



# UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
09/777,969	02/05/2001	Brig Barnum Elliott	00-4029	4247

52127 7590 02/04/2005

VERIZON CORPORATE SERVICES GROUP INC.  
C/O CHRISTIAN R. ANDERSEN  
600 HIDDEN RIDGE DRIVE  
MAILCODE HQEO3H14  
IRVING, TX 75038



EXAMINER

PHAM, TUAN


ART UNIT PAPER NUMBER


2643

DATE MAILED: 02/04/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

5/4/05  
CA

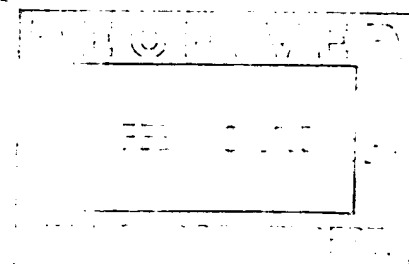



## Office Action Summary

### Application No.

09/777,969

### Applicant(s)

ELLIOTT, BRIG BARNUM

### Examiner

TUAN A PHAM

### Art Unit

2643

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --  
**Period for Reply**

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

### Status

- 1) ☒ Responsive to communication(s) filed on 14 October 2004.
- 2a) ☒ This action is **FINAL**. 2b) ☐ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

### Disposition of Claims

- 4) ☒ Claim(s) 1-88 is/are pending in the application.
- 4a) Of the above claim(s) \_\_\_\_\_ is/are withdrawn from consideration.
- 5) ☐ Claim(s) \_\_\_\_\_ is/are allowed.
- 6) ☒ Claim(s) 1-10, 14-23, 27-35, 60-67, 73-83, 86 and 87 is/are rejected.
- 7) ☐ Claim(s) \_\_\_\_\_ is/are objected to.
- 8) ☐ Claim(s) \_\_\_\_\_ are subject to restriction and/or election requirement.

### Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☐ The drawing(s) filed on \_\_\_\_\_ is/are: a) ☐ accepted or b) ☐ objected to by the Examiner.  
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).  
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

### Priority under 35 U.S.C. § 119

- 12) ☐ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☐ All b) ☐ Some \* c) ☐ None of:
- ☐ Certified copies of the priority documents have been received.
  - ☐ Certified copies of the priority documents have been received in Application No. \_\_\_\_\_.
  - ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- \* See the attached detailed Office action for a list of the certified copies not received.

### Attachment(s)

- 1) ☒ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftsperson's Patent Drawing Review (PTO-948)
- 3) ☐ Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)  
Paper No(s)/Mail Date: \_\_\_\_\_
- 4) ☐ Interview Summary (PTO-413)  
Paper No(s)/Mail Date: \_\_\_\_\_
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: \_\_\_\_\_

## **DETAILED ACTION**

### ***Response to Arguments***

1. Applicant's arguments with respect to claims 1-10, 14-23, 27-35, 60-67, 73-83, and 86-87 have been considered but are moot in view of the new ground(s) of rejection.

### ***Claim Rejections - 35 USC § 102***

2. The following is a quotation of the appropriate paragraphs of 35 U.S.C. 102 that form the basis for the rejections under this section made in this Office action:

A person shall be entitled to a patent unless –

(e) the invention was described in a patent granted on an application for patent by another filed in the United States before the invention thereof by the applicant for patent, or on an international application by another who has fulfilled the requirements of paragraphs (1), (2), and (4) of section 371(c) of this title before the invention thereof by the applicant for patent.

The changes made to 35 U.S.C. 102(e) by the American Inventors Protection Act of 1999 (AIPA) and the Intellectual Property and High Technology Technical Amendments Act of 2002 do not apply when the reference is a U.S. patent resulting directly or indirectly from an international application filed before November 29, 2000. Therefore, the prior art date of the reference is determined under 35 U.S.C. 102(e) prior to the amendment by the AIPA (pre-AIPA 35 U.S.C. 102(e)).

3. Claims 1-2, 4-10, 14-15, 17-23, 27, and 29-35 are rejected under 35 U.S.C. 102(e) as being anticipated by Matsuda et al. (Pub. No.: US 2001/0014616, hereinafter, "Matsuda").

**Regarding claims 1 and 27,** Matsuda teaches a method and program product for operating a user communication device (see figure 15), comprising the steps of:

- providing a pre-configured and complete digital representation of an audible signal in each of a plurality of memory locations of a memory of the user communication device (see figure 3, figure 4, pattern number memory 103, each pattern number is associated with each memory location for storing the ringing sound, col.4, [0040-0042]);
- receiving a call signal at the user communication device, the audible signals being unique with respect to one another (see figure 18, col.4, [0040-0042], each pattern number is associated with one unique of ringing sound);
- in response to receiving the call signal at the user communication device, selecting one of the plurality of memory locations (see col.4, [0040-0042]); and
- generating the audible signal represented by the pre-configured and complete digital representation provided in the memory location selected in the selecting step (see col.4, [0040-0042]).

**Regarding claim 2,** Matsuda further teaches a method wherein the user communication device comprises at least one of a telephone and a radiotelephone (see figure 15, col.2, [0033]).

**Regarding claims 4 and 29,** Matsuda further teaches a method wherein the providing step comprises the steps of: applying at least one audible signal to an input of a user input-interface of the user communication device, and outputting at least one corresponding analog signal within the device; in response to the inputting step, converting the at least one analog signal to at least one corresponding digital

representation of that at least one audible signal; and storing the at least one digital representation in the memory of the user communication device (see figure 15, coding/decoding 1512, col.5, [0047-0048]).

**Regarding claims 5 and 31,** Matsuda further teaches a method further comprising a step of determining at least one of a date and a time at which the call signal is received in the user communication device, and wherein the step of selecting one of the plurality of memory locations is performed based on a result of the determining step (see figure 5, incoming call time detector 202, col.5, [0051]).

**Regarding claims 6 and 32,** Matsuda further teaches a method wherein the selecting step is performed by randomly selecting one of the pluralities of memory locations (see figure 3, col.4, [0040]).

**Regarding claims 7 and 33,** Matsuda further teaches a method further comprising a step of operating an input-user interface of the user communication device to input information into the user communication device specifying that one of the plurality of memory locations be selected, and wherein the selecting step is performed by selecting the memory location specified by the inputted information (see col.5, [0047-0048]).

**Regarding claims 8 and 30,** Matsuda further teaches a method wherein the selecting step is performed based on predetermined information included in the received call signal (see figure 2, col.4, [0040], selecting the ring tone is based on the receiving telephone number).

**Regarding claims 9 and 34,** Matsuda further teaches a method wherein the generating step is performed by generating the audible signal at predetermined time intervals (see col.3, [0037]).

**Regarding claims 10 and 35,** Matsuda further teaches a method further comprising the steps of: determining at least one acoustic characteristic of at least one of the audible signals, based on at least one digital representation representing that at least one audible signal; comparing the at least one acoustic characteristic determined in the determining step to at least one predetermined acoustic characteristic; and scaling the at least one digital representation based on a result of the comparing step, to normalize the at least one acoustic characteristic of the at least one audible signal (see col.4, [0042]).

**Regarding claim 14,** Matsuda teaches a user communication device (see figure 15), comprising: a memory including a plurality of memory locations, each storing a digital representation of a corresponding audible signal (see figure 4, pattern number 1-4, col.4, [0004]; a communication interface, coupled to an external interface, for receiving a call signal forwarded from a source communication device through the external interface (see figure 15, external interface 1510, the antenna receive the signal from the caller, which is associated source communication device, col.4, [0042]); an output-user interface having an input, the output-user interface for outputting an audible signal in response to an analog signal being applied to that input (see figure 15, speaker 1520, col.2, [0033]); a converter having an input and an output, the output being coupled to the input of the output-user interface, the converter for converting digital

information applied to the input thereof to a corresponding analog signal (see figure 15, coding/decoding 1512, col.2, [0033]); and a controller coupled to the memory, the communication interface, and the input of the converter, the controller being responsive to receiving the call signal from the communication interface for selecting one of the plurality of memory locations, and for applying the digital representation stored in the selected memory location to the input of the converter, to cause the converter to output a corresponding analog signal to the input of the output-user interface, and thereby cause the output-user interface to output the corresponding audible signal (see figure 1, figure 15, memory 1515, coding/decoding 1512, controller 1516, speaker 1520, col.2, [0033-0034]).

**Regarding claim 15,** Matsuda further teaches the user communication device comprises at least one of a telephone and a radiotelephone (see figure 15, col.2, [0033]).

**Regarding claim 17,** Matsuda further teaches the user communication device further comprising: an input interface having an input, and also having an output coupled to said controller, said input interface being responsive to each individual audible signal being applied to that input for outputting a corresponding analog signal in said user communication device; and a further converter interposed between an output of said input interface and an input of said controller, said further converter being responsive to receiving each individual analog signal for producing the corresponding digital representation, and wherein said controller is responsive to each individual produced digital representation for storing the produced digital representation in said

memory (see figure 1, figure 15, memory 1515, coding/decoding 1512, controller 1516, speaker 1520, col.2, [0033-0034]).

**Regarding claim 18,** Matsuda further teaches the user communication device wherein said controller selects one of the plurality of memory locations based on predetermined information included in the call signal (see col.4, [0040]).

**Regarding claim 19,** Matsuda further teaches the user communication device wherein said controller is responsive to the call signal being received for determining at least one of a date and a time at which the call signal is received in the user communication device, and selects one of the plurality of memory locations based on the determined at least one of the date and time (see col.5, [0051]).

**Regarding claim 20,** Matsuda further teaches the user communication device wherein said controller selects one of the plurality of memory locations at random (see figure 3, col.4, [0040]).

**Regarding claim 21,** Matsuda further teaches the user communication device wherein said user communication device further comprises an input user interface for inputting, into said controller, information specifying that one of the plurality of memory locations be selected, and said controller is responsive to the call signal being received for selecting the memory location specified by the information inputted through said input user interface (see figure 17a-17c, col.3, [0037]).

**Regarding claim 22,** Matsuda further teaches the user communication device wherein said controller applies the retrieved digital representation to the input of said



converter at predetermined time intervals, to cause the audible signal to be output at those predetermined time intervals (see figure 17a-17c, col.3, [0037]).

**Regarding claim 23**, Matsuda further teaches the user communication device determining at least one acoustic characteristic of at least one of the audible signals, based on at least one digital representation representing that at least one audible signal; comparing the at least one acoustic characteristic determined in the determining step to at least one predetermined acoustic characteristic; and scaling the at least one digital representation based on a result of the comparing step, to normalize the at least one acoustic characteristic of the at least one audible signal (see col.4, [0042]).

### ***Claim Rejections - 35 USC § 103***

4. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

5. Claims 3, 16, 28, and 60-66 are rejected under 35 U.S.C. 103(a) as being unpatentable over Matsuda et al. (Pub. No.: US 2001/0014616, hereinafter, "Matsuda") in view of Lee (U.S. Patent No.: 6,418,330).

**Regarding claims 3 and 28**, Matsuda teaches method and apparatus for operating a user communication device (see figure 15), comprising the steps of:

providing a pre-configured and complete digital representation of an audible signal in each of a plurality of memory locations of a memory of the user communication device (see figure 3, figure 4, pattern number memory 103, each pattern number is associated with each memory location for storing the ringing sound, col.4, [0040-0042]);

receiving a call signal at the user communication device, the audible signals being unique with respect to one another (see figure 18, col.4, [0040-0042], each pattern number is associated with one unique of ringing sound);

in response to receiving the call signal at the user communication device, selecting one of the plurality of memory locations (see col.4, [0040-0042]); and

generating the audible signal represented by the pre-configured and complete digital representation provided in the memory location selected in the selecting step (see col.4, [0040-0042]).

It should be noticed that Matsuda fails to teaches the user communication device is coupled to a network having a storage device, and the providing step comprises the steps of: receiving, at the user communication device, each digital representation from the storage device; and storing each received digital representation in a respective one of the memory locations. However, Lee teaches such features (see figure 2, database 200, radio 130, col.2, ln.62-67, col.3, ln.1-5) for a purpose of downloading the ring tone to the mobile device.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of the user communication device is coupled to a network having a storage device, and the providing step comprises the

steps of: receiving, at the user communication device, each digital representation from the storage device; and storing each received digital representation in a respective one of the memory locations, as taught by Lee, into view of Matzuda in order to store the different ring tone in the mobile device and as suggested by Lee at col.1, ln.35-45.

**Regarding claim 16**, Matsuda teaches a user communication device (see figure 15), comprising: a memory including a plurality of memory locations, each storing a digital representation of a corresponding audible signal (see figure 4, pattern number 1-4, col.4, [0004]); a communication interface, coupled to an external interface, for receiving a call signal forwarded from a source communication device through the external interface (see figure 15, external interface 1510, the antenna receive the signal from the caller, which is associated source communication device, col.4, [0042]); an output-user interface having an input, the output-user interface for outputting an audible signal in response to an analog signal being applied to that input (see figure 15, speaker 1520, col.2, [0033]); a converter having an input and an output, the output being coupled to the input of the output-user interface, the converter for converting digital information applied to the input thereof to a corresponding analog signal (see figure 15, coding/decoding 1512, col.2, [0033]); and a controller coupled to the memory, the communication interface, and the input of the converter, the controller being responsive to receiving the call signal from the communication interface for selecting one of the plurality of memory locations, and for applying the digital representation stored in the selected memory location to the input of the converter, to cause the converter to output a corresponding analog signal to the input of the output-user interface, and thereby

Art Unit: 2643

cause the output-user interface to output the corresponding audible signal (see figure 1, figure 15, memory 1515, coding/decoding 1512, controller 1516, speaker 1520, col.2, [0033-0034]).

It should be noticed that Matsuda fails to teaches the controller is in communication with at least one communication network through the external interface and said communication interface, the at least one communication network has a storage device for storing each digital representation, and wherein said controller is responsive to receiving each individual digital representation from the storage device of the at least one network for storing that digital representation in said memory..

However, Lee teaches such features (see figure 2, database 200, radio 130, col.2, ln.62-67, col.3, ln.1-5) for a purpose of downloading the ring tone to the mobile device.

Therefore, it would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of the controller is in communication with at least one communication network through the external interface and said communication interface, the at least one communication network has a storage device for storing each digital representation, and wherein said controller is responsive to receiving each individual digital representation from the storage device of the at least one network for storing that digital representation in said memory, as taught by Lee, into view of Matzuda in order to store the different ring tone in the mobile device and as suggested by Lee at col.1, ln.35-45.

Regarding claim 60, Matsuda teaches a second user communication device comprising a memory (see figure 15, memory 1515, col.2, [0033]), a second communication interface coupled to the external interface (see figure 15, antenna 1510, col.2, [0033]), and an audible signal generator portion coupled to the memory and the second communication interface (see figure 15, ringing sound generator 1519, memory 1515, col.2, [0033]), wherein the memory has a plurality of memory locations, each of which stores a digital representation of a corresponding audible signal (see figure 4, pattern number memory 1-4, col.4, [0040]), and the audible signal generator portion is responsive to the call signal being received from the first user communication device through the second communication interface for selecting one of the memory locations and for generating the audible signal represented by the digital representation stored in the selected memory location (see col.2, [0033], col.4, [0040]).

It should be noticed that Matsuta fails to clearly teach a communication system, comprising: a first user communication device comprising a first communication interface coupled to an external interface, and a controller coupled to the first communication interface, the controller being operable for forwarding a call signal through the first communication interface. However, Lee teaches such features (see figure2, figure 3, calling terminal 100, terminal 100 can be a mobile device that is included a antenna and controller for receiving and controlling the RF signal, col.1, ln.35-45) for a purpose of communicating with other device through the network.

Therefore, It would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of a first user communication device

Art Unit: 2643

comprising a first communication interface coupled to an external interface, and a controller coupled to the first communication interface, the controller being operable for forwarding a call signal through the first communication interface, as taught by Lee, into view of Matsuda in order to conveniently communicate with other device through the network.

**Regarding claim 61,** Lee further teaches a communication system wherein each of the first and second user communication devices comprise one of a telephone, a radiotelephone, and an information appliance (see figure 2, telephone 100, radio 130).

**Regarding claim 62,** Matsuda further teaches a communication system wherein the audible signal generator portion selects one of the memory locations based on predetermined information included in the received call signal (see figure 2, col.4, [0040], selecting the ring tone is based on the receiving telephone number).

**Regarding claim 63,** Matsuda further teaches a communication system wherein the audible signal generator portion is responsive to the call signal being received for determining at least one of a date and a time at which the call signal is received, and selects one of the plurality of memory locations based on a result of that determination (see col.5, [0051]).

**Regarding claim 64,** Matsuda further teaches a communication system wherein the audible signal generator portion randomly selects one of the pluralities of memory locations (see figure 3, col.4, [0040]).

**Regarding claim 65,** Matsuda further teaches a communication system wherein said second user communication device further comprises an input-user interface

Art Unit: 2643

coupled to the audible signal generator portion, for inputting information into that device specifying that one of the plurality of memory locations be selected, and wherein the audible signal generator portion is responsive to the call signal being received for selecting the memory location specified by that inputted information (see col.5, [0047-0048]).

**Regarding claim 66,** Lee further teaches a communication system wherein the communication system also comprises at least one communication network coupled to the first and second user communication devices through the respective first and second communication interfaces, said at least one communication network comprises a message station and a storage device storing the digital representations of the audible signals, wherein at least one of the controller of said first user communication device and the audible signal generator portion of said second user communication device is operable for communicating a download request to the at least one network, and wherein the message station is responsive to receiving the download request for providing the digital representations from the storage device to the second communication interface of the second user communication device, and wherein the audible signal generator portion of said second user communication device is responsive to receiving the digital representations from the second communication interface for storing the digital representations in respective ones of the memory locations in the memory (see figure 2, database 200, col.2, ln.63-67, col.3, ln.1-35).

6. Claim 73- 83, and 86-87 are rejected under 35 U.S.C. 103(a) as being unpatentable over Yamashita (U.S. Patent No.: 6,070,053) in view of Matsuda et al. (Pub. No.: US 2001/0014616, hereinafter, "Matsuda").

**Regarding claims 73 and 80**, Yamashita teaches a method and apparatus for operating a user communication device, comprising the steps of:

a memory; an interface; and a controller coupled to said memory and said interface (see figure 1, memory 5, antenna 1, controller 3),

receiving an incoming call signal transmitted by another device to make a call to the communication device (see col.2, ln.17-30), the incoming call signal including at least one identifier identifying the other communication device and at least one signal representing at least one corresponding user perceptible alerting signal that is to be generated in response to a call being received from the other communication device (see col.4, ln.29-67, col.5, ln.1-15).

It should be noticed that Yamashita fails to teach storing in a memory of the user communication device, the at least one identifier (i.e. telephone number) in association with the at least one signal; and generating the at least one corresponding user perceptible alerting signal in response to the call being received from the other communication device. However, Matsuda teaches such features (see figure 4, col.4, [0040-0042]) for a purpose of storing plurality different ring tone.

Therefore, It would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of storing in a memory of the user communication device, the at least one identifier (i.e. telephone number) in association



with the at least one signal; and generating the at least one corresponding user perceptible alerting signal in response to the call being received from the other communication device, as taught by Matsuda, into view of Yamashita in order to provide different ring tone.

**Regarding claim 74**, Matsuda teaches a method wherein the user-perceptible alerting signal includes an audible signal (see col.4, [0040]).

**Regarding claim 75**, Yamashita teaches a method further comprising a step of normalizing the entered at least one signal in accordance with predetermined criteria (see col.4, ln.29-46).

**Regarding claim 76**, Matsuda teaches a method wherein the identifier comprises at least one of a telephone number (see figure 4).

**Regarding claims 77, 81, and 86**, Yamashita teaches a method and apparatus for operating a user communication device, comprising:

communication interface means for receiving an incoming call signal from a calling source, the call signal including both an identifier which identifies the calling source and information representing a user-perceptible alerting signal (see col.2, ln.18-31, col.4, ln.29-45, col.5, ln.1-15).

It should be noticed that Yamashita fails to teach output user-interface means; a storage means storing a plurality of identifiers identifying calling sources from which call signals may be received; and control means coupled to said communication interface means, said output user-interface means, and said storage means, said control means being responsive to receiving the call signal from said communication interface means

for comparing the identifier included in the call signal with the plurality of identifiers stored in said storage means to determine whether any of the compared identifiers correspond to one another, and, if it is determined that the identifier included in the call signal corresponds to any of the identifiers stored in the storage means, for controlling said output user-interface means to cause that output user-interface means to generate the user-perceptible alerting signal represented by the information included in the call signal in response to the call signal being received. However, Matsuda teaches such features (see figure 15, col.4, [0040-0042]) for a purpose of selecting different ring tone.

Therefore, It would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of output user-interface means; a storage means storing a plurality of identifiers identifying calling sources from which call signals may be received; and control means coupled to said communication interface means, said output user-interface means, and said storage means, said control means being responsive to receiving the call signal from said communication interface means for comparing the identifier included in the call signal with the plurality of identifiers stored in said storage means to determine whether any of the compared identifiers correspond to one another, and, if it is determined that the identifier included in the call signal corresponds to any of the identifiers stored in the storage means, for controlling said output user-interface means to cause that output user-interface means to generate the user-perceptible alerting signal represented by the information included in the call signal in response to the call signal being received, as taught by Matsuda, into view of Yamashita in order to provide different ring tone.

**Regarding claims 78 and 82**, Yamashita further teaches a method wherein if it is determined that the identifier included in the received call signal does not correspond to any of the identifiers stored in the memory, a step is performed of generating a different user-perceptible alerting signal (see col.4, ln.50-67).

**Regarding claims 79, 83, and 87**, Matsuda teaches a method wherein the user-perceptible alerting signal includes an audible signal (see col.4, [0040]).

7. Claim 67 is rejected under 35 U.S.C. 103(a) as being unpatentable over Matsuda et al. (Pub. No.: US 2001/0014616, hereinafter, "Matsuda") in view of Lee (U.S. Patent No.: 6,418,330) as applied to claim 60 above, and further in view of Lin et al. (U.S. Patent No.: 6,366,791, hereinafter, "Lin").

**Regarding claim 67**, Matsuda and Lee, in combination, fails to clearly teach the download request a plurality of times at respective predetermined time intervals. However, Lin teaches such feature (see col.4, ln.56-67) for a purpose of requesting download the ring tone.

Therefore, It would have been obvious to one of ordinary skill in the art at the time the invention was made to incorporate the use of download request a plurality of times at respective predetermined time intervals, as taught by Lin, into view of Matsuda and Lee in order to request for downloading the ring tone to mobile device.

Art Unit: 2643

### Conclusion

8. Applicant's amendment necessitated the new ground(s) of rejection presented in this Office action. Accordingly, **THIS ACTION IS MADE FINAL**. See MPEP § 706.07(a). Applicant is reminded of the extension of time policy as set forth in 37 CFR 1.136(a).

A shortened statutory period for reply to this final action is set to expire **THREE MONTHS** from the mailing date of this action. In the event a first reply is filed within **TWO MONTHS** of the mailing date of this final action and the advisory action is not mailed until after the end of the **THREE-MONTH** shortened statutory period, then the shortened statutory period will expire on the date the advisory action is mailed, and any extension fee pursuant to 37 CFR 1.136(a) will be calculated from the mailing date of the advisory action. In no event, however, will the statutory period for reply expire later than **SIX MONTHS** from the date of this final action.

**Any response to this final action should be mailed to:**

**Box AF**

**Commissioner of Patents and Trademarks  
Washington, D.C. 20231**

**or faxed to:**

**(703) 872-9314 (for formal communications; please mark  
"EXPEDITED PROCEDURE")**

**Or:**

**If it is an informal or draft communication, please label  
"PROPOSED" or "DRAFT")**

**Customer Service (703) 306-0377**

**Hand-delivered responses should be brought to Crystal Park II, 2121**

**Crystal Drive, Arlington, VA., Sixth Floor (Receptionist)**

9. Any inquiry concerning this communication or earlier communications from the examiner should be directed to **Tuan A. Pham** whose telephone number is

Art Unit: 2643


(703) 305-4987. The examiner can normally be reached on Monday through Friday,  
8:00 AM-5:00 PM.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's  
supervisor, Mr. Curtis Kuntz can be reached on (703) 305-4708 and

**IF PAPER HAS BEEN MISSED FROM THIS OFFICIAL ACTION PACKAGE, PLEASE  
CALL Customer Service at (703) 306-0377 FOR THE SUBSTITUTIONS OR COPIES.**

Information regarding the status of an application may be obtained from the  
Patent Application Information Retrieval (PAIR) system. Status information for  
published applications may be obtained from either Private PAIR or Public PAIR.  
Status information for unpublished applications is available through Private PAIR only.  
For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should  
you have question on access to the Private PAIR system, contact the Electronic  
Business Center (EBC) at 866-217-9197 (toll-free).

Art Unit 2643  
January 26, 2005  
Examiner

  
CURTIS KUNTZ  
1,000,000 PATENT EXAMINER  
ELECTRONIC CENTER 2600

**Notice of References Cited**

Application/Control No.

09/777,969

Applicant(s)/Patent Under  
Reexamination  
ELLIOTT, BRIG BARNUM

Examiner

TUAN A PHAM

Art Unit

2643

Page 1 of 1

**U.S. PATENT DOCUMENTS**

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Name	Classification
	A	US-2001/0014616	08-2001	Matsuda et al.	455/567
	B	US-6,418,330	07-2002	Lee, Hyeon-Woo	455/567
	C	US-6,070,053	05-2000	Yamashita, Tomohisa	340/7.58
	D	US-6,366,791	04-2002	Lin et al.	455/567
	E	US-			
	F	US-			
	G	US-			
	H	US-			
	I	US-			
	J	US-			
	K	US-			
	L	US-			
	M	US-			


**FOREIGN PATENT DOCUMENTS**

*		Document Number Country Code-Number-Kind Code	Date MM-YYYY	Country	Name	Classification
	N					
	O					
	P					
	Q					
	R					
	S					
	T					

**NON-PATENT DOCUMENTS**

*		Include as applicable: Author, Title Date, Publisher, Edition or Volume, Pertinent Pages)
	U	
	V	
	W	
	X	

\*A copy of this reference is not being furnished with this Office action. (See MPEP § 707.05(a))  
Dates in MM-YYYY format are publication dates. Classifications may be US or foreign.



Patent Status as of 2/8/2005

METHOD, APPARATUS AND PROGRAM FOR PROVIDING USER-SELECTED ALERTING SIGNALS IN  
TELECOMMUNICATIONS DEVICES

Docket No.00-4029  
Country:United States  
Owner:Verizon Corporate Services GroupInc  
& BBNT Solutions LLC

Application No. 9/ 777,969  
Patent No.  
Publication No. 2002-0106074A1  
Case Type:Regular  
Filing Type:National

Filing Date:2/5/2001  
Grant Date:  
Publication Date:8/8/2002  
Relation Type:Original Filing  
PCT/EP Countries:

Related I.D.:  
Parent No.  
Priority Filing Date Claimed: 2/5/2001  
Class:

Parent Filing Date:

U.S.CLASS: 379.  
Total No. Claims:088  
Inventors: Elliott; Brig B.  
Status:Published  
Next Tax Due Date:  
Supervisor:Unassigned  
Prosecutor:Fitzpatrick, Cella, Harper & Scint  
GTE Associate:Chris Andersen

No. Independent Claims:19  
Status Date:8/8/2002  
Expiration Date:  
Agent:  
Agent Reference No.  
Co-Owners:Gen.Cat.B

Schedule C

Action Code	Action Description	Action Due	Completed
-----	-----	-----	-----
RG3	Responsible Prosecution Attorney Check	2/15/2005	
ERS	Final Office Action Early Response Date	4/4/2005	
RET	Response to Final Offc.Act. Due	5/4/2005	
AQ2	Last Date to File Notice of Appeal	8/4/2005	
IDX	Date of Invention		3/18/2000
IDM	Date of Invention Disclosure		3/20/2000
IDR	Invention Discl. Received by VZ		3/21/2000
IDL	Inventor Informed of Discl. Recpt.		3/21/2000
IDI	Invention Discl. Docketed by VZ		3/21/2000
DOC	File Docketed		3/23/2000
FLG	Flag for Internet		3/23/2000
ICZ	Invent.Discl. Sent to Agent to Process	5/21/2000	4/11/2000
APD	Application Filing Date	6/2/2000	2/5/2001
IDA	IDS Not Applicable	5/5/2001	2/5/2001
PWX	Pwr Of Atty & Declaration Filed PTO		2/5/2001
ASM	Assignment Filed PTO/PCT		2/5/2001
ASH	Assignment Recorded		2/5/2001

Patent Status as of 2/9/2005

METHOD, APPARATUS AND PROGRAM FOR PROVIDING USER-SELECTED ALERTING SIGNALS IN  
TELECOMMUNICATIONS DEVICES

Docket No.03-4029

Country:United States

Owner:Verizon Corporate Services Group Inc  
& BBNT Solutions LLC

Application No. 9/ 777,969

Patent No.

Publication No. 2002-C106074A1

Case Type:Regular

Filing Type:National

Filing Date:2/5/2001

Grant Date:

Publication Date:8/8/2002

Relation Type:Original Filing

PCT/EP Countries:

Related I.D.:

Parent No.

Priority Filing Date Claimed: 2/5/2001

Class:

U.S.CLASS: 379.

Total No. Claims:088

Inventors: Elliott; Brig B.

Status:Published

Next Tax Due Date:

Supervisor:Unassigned

Prosecutor:Fitzpatrick, Cella, Harper & ScintAgent Reference No.

GTE Associate:Chris Andersen

Parent Filing Date:

No. Independent Claims:19

Status Date:8/8/2002

Expiration Date:

Agent:

Co-Owners:Gen.Cat.B

Schedule C

Action Code	Action Description	Action Due	Completed
-----	-----	-----	-----
DRS	Formal Drawings Filed PTO		2/5/2001
INV	Invention Award Authoriztn Requestd		2/14/2001
FOG	Foreign Filing License Granted		4/12/2001
FIT	Filing Receipt Issued		5/4/2001
ASN	Notice of Assignment Recordation		5/18/2001
RVF	Review For Foreign Filing	8/5/2001	1/8/2002
NOF	No Foreign Filing/PRO Appl. Expired	2/5/2002	1/8/2002
FOF	Recomendations for Foreign Filing Asked		1/8/2002
FOE	Foreign Filing Recomendations Returned		1/8/2002
IDF	IDS Filed		3/8/2002
PBC	Publication Completed	8/5/2002	8/8/2002
EYY	Examiner's Telecon Received		3/23/2004
EXE	Examiner's Interview	2/5/2002	3/24/2004
REQ	Restriction Request Issued	3/31/2004	4/2/2004
RGJ	Agent Asked Reply Restriction Request		4/28/2004
AGL	Agent Acknowledged Instructions		4/28/2004
RFF	Agent Sent Prepared Response to VZ		4/29/2004



Patent Status as of 2/9/2005

METHOD, APPARATUS AND PROGRAM FOR PROVIDING USER-SELECTED ALERTING SIGNALS IN  
TELECOMMUNICATIONS DEVICES

Docket No.00-4029

Country:United States

Owner:Verizon Corporate Services GroupInc  
& BBNT Solutions LLC

Application No. 9/ 777,969

Patent No.

Publication No. 2002-0106074A1

Case Type:Regular

Filing Type:National

Filing Date:2/5/2001

Grant Date:

Publication Date:8/8/2002

Relation Type:Original Filing

PCT/EP Countries:

Related I.D.:

Parent No.

Priority Filing Date Claimed: 2/5/2001

Class:

U.S.CLASS: 379.

Total No. Claims:088

Inventors: Elliott; Brig B.

Status:Published

Next Tax Due Date:

Supervisor:Unassigned

Prosecutor:Fitzpatrick, Cella, Harper & ScintAgent Reference No.

GTE Associate:Chris Andersen

Parent Filing Date:

No. Independent Claims:19

Status Date:8/8/2002

Expiration Date:

Agent:

Co-Owners:Gen.Cat.B

Schedule C

Action Code	Action Description	Action Due	Completed
-----	-----	-----	-----
EX1	Extension of Time Request Planned		5/7/2004
ASM	Assignment Filed PTO/PCT		5/18/2004
ASH	Assignment Recorded		5/18/2004
ASN	Notice of Assignment Recordation		5/21/2004
RF1	Restriction Request Response Made	6/2/2004	6/2/2004
PEF	Petition for Extension of Time Filed	6/2/2004	6/2/2004
OFA	Office Action Issued	7/2/2004	7/14/2004
RFF	Agent Sent Prepared Response to VZ		9/22/2004
RGM	J.Wall Approved Final for PTO Filing		10/13/2004
AMN	Amendment Filed	10/14/2004	10/14/2004
FOA	Final Office Action Issued	12/14/2004	2/4/2005
RG2	OFA Sent JRP for Review w/r Prosecution		2/8/2005

Christian R. Andersen  
Senior Paralegal -  
Intellectual Property  
Legal Department



Verizon Corporate  
Services Group Inc.  
HQE03H14  
600 Hidden Ridge Drive  
Irving, TX 75038

Phone 972 718-4800  
Fax 972 718-3946  
christian.andersen@verizon.com

February 11, 2005

VIA COURIER

Edward J. Kelly, Esq  
Ropes & Gray  
One International Place  
Boston, MA 02110

Re: Jointly Held Patent Properties with  
Verizon Corporate Services Group Inc.

Dear Ed:

Enclosed with this letter are documents relating to the continued prosecution of various Verizon company patent applications currently jointly held with BBNT Solutions LLC.

You are receiving either (1) new communications received from the United States Patent and Trademark Office (USPTO) or (2) copies of correspondence recently filed by our offices on jointly-held properties. These copies are for your records.

Please feel free to contact either Len Suchyta or myself should you have any questions or input regarding the enclosed matters. We will continue to send you materials as they are received and processed by our offices.

Sincerely,

A handwritten signature in cursive script that reads "Christian R. Andersen".

Christian R. Andersen  
Senior Paralegal - Intellectual Property

CRA:  
Enclosures – via courier

c: L. C. Suchyta – Verizon Corporate Services Group Inc. (w/o enc.)